



DECLARATION OF PERFORMANCE

No. 01010104201-CPR-13

Unique identification code of the product-type:	01010104201
Intended use/es:	K-FLEX ST, 6-25 mm, Ø 6-300 mm, pipe* THIBELI : Flexible Elastomeric Foam, intended to be used as Thermal insulation for building equipment and industrial installations.
Manufacturer:	L'Isolante K-Flex Spa, Via Don Locatelli 35, 20877 Roncello (MB), ITALY
System/s of AVCP:	1 & 3
Harmonised standard:	EN 14304:2009+A1:2013
Notified body:	Notified certification body No. 0751 performed, carried out the determination of the product type, the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of constancy of performance for reaction to fire. Notified testing laboratory No. 0497 performed the test reports for reaction to fire.

Declared performance/s:

Essential Characteristics	Performance
Thermal resistance / Thermal conductivity	$\lambda_{0^{\circ}\text{C}} \leq 0,033 \text{ W}/(\text{m}^{\circ}\text{K})$ $\lambda_{40^{\circ}\text{C}} \leq 0,037 \text{ W}/(\text{m}^{\circ}\text{K})$ $\lambda(\vartheta_m) = (33 + 0,087 \cdot \vartheta_m + 0,00098 \cdot \vartheta_m^2) / 1000 \text{ W}/(\text{m}^{\circ}\text{K})$
Dimensions and tolerances	Di = 6-300 mm, dD = 6-25 mm
Reaction to fire	BL-s2,d0
Durability of thermal resistance against ageing/degradation	Dimensional stability (1) Minimum service temperature ST(-) 165 (=165 °C)
Durability of thermal resistance against high temperature	Maximum service temperature ST(+) 110 (=110 °C)
Durability of reaction to fire against high temperature	(2)
Durability of reaction to fire against ageing / degradation	(2)
Compressive strength	(3)
Water permeability	WS01
Water vapour permeability / Water vapour diffusion resistance	10000 μ
Rate of release of corrosive substances	Cl < 500ppm, pH = 7
Acoustic (absorption) index	NPD
Release of dangerous substances to the indoor environment	(4)
Continuous glowing combustion	(4)

*Tolerances as per European Regulation EN 14304:2009+A1:2013 – Table 1

- 1) The thermal conductivity of FEF does not change with time.
 - 2) The fire performance of FEF does not change with time.
 - 3) Compressive strength is not applicable for FEF products.
 - 4) European test methods are under development
- NPD = No Performance Determined.

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.


This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 (Requirements for Safety Data Sheets) of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in product data sheet. As required by article 33 of regulation (EC) No 1907/2006 (Duty to communicate information on substances in article) we declare as follows: Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0.1 % (w/w).

Roncello, 12/02/2021

Signed for and on behalf of the manufacturer by:



Amedeo Spinelli, President

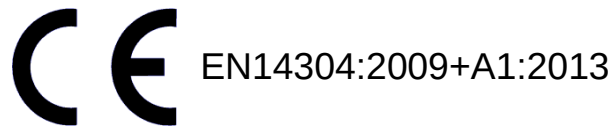

DECLARATION OF PERFORMANCE

No. 01050104201-CPR-16

Unique identification code of the product-type:	01050104201
Intended use/es:	K-FLEX ST, 26-50 mm, Ø 6-300 mm, pipe* THIBELI : Flexible Elastomeric Foam, intended to be used as Thermal insulation for building equipment and industrial installations.
Manufacturer:	L'Isolante K-Flex Spa, Via Don Locatelli 35, 20877 Roncello (MB), ITALY
System/s of AVCP:	1 & 3
Harmonised standard:	EN 14304:2009+A1:2013
Notified body:	Notified certification body No. 0751 performed, carried out the determination of the product type, the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of constancy of performance for reaction to fire. Notified testing laboratory No. 0497 performed the test reports for reaction to fire.

Declared performance/s:

Essential Characteristics	Performance
Thermal resistance / Thermal conductivity	$\lambda_{0^{\circ}\text{C}} \leq 0,036 \text{ W/(m}^{\circ}\text{K)}$ $\lambda_{40^{\circ}\text{C}} \leq 0,040 \text{ W/(m}^{\circ}\text{K)}$ $\lambda(\vartheta_m) = (36 + 0,087 \cdot \vartheta_m + 0,00098 \cdot \vartheta_m^2) / 1000 \text{ W/(m}^{\circ}\text{K)}$
Dimensions and tolerances	Di = 6-300 mm, dD = 26-50 mm
Reaction to fire	BL-s2,d0
Durability of thermal resistance against ageing/degradation	Dimensional stability (1) Minimum service temperature ST(-) 165 (=165 °C)
Durability of thermal resistance against high temperature	Maximum service temperature ST(+) 110 (=110 °C)
Durability of reaction to fire against high temperature	(2)
Durability of reaction to fire against ageing / degradation	(2)
Compressive strength	(3)
Water permeability	WS01
Water vapour permeability / Water vapour diffusion resistance	7000 μ
Rate of release of corrosive substances	Cl < 500ppm, pH = 7
Acoustic (absorption) index	NPD
Release of dangerous substances to the indoor environment	(4)
Continuous glowing combustion	(4)

*Tolerances as per European Regulation EN 14304:2009+A1:2013 – Table 1

- 1) The thermal conductivity of FEF does not change with time.
 - 2) The fire performance of FEF does not change with time.
 - 3) Compressive strength is not applicable for FEF products.
 - 4) European test methods are under development
- NPD = No Performance Determined.

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.


This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 (Requirements for Safety Data Sheets) of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in product data sheet. As required by article 33 of regulation (EC) No 1907/2006 (Duty to communicate information on substances in article) we declare as follows: Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0.1 % (w/w).

Roncello, 12/02/2021

Signed for and on behalf of the manufacturer by:



Amedeo Spinelli, President

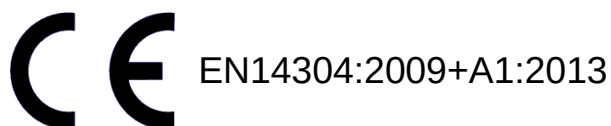

DECLARATION OF PERFORMANCE

No. 01090105201-CPR-13

Unique identification code of the product-type:	01090105201
Intended use/es:	K-FLEX ST, 51-75 mm, Ø 6-300 mm, pipe* THIBELL : Flexible Elastomeric Foam, intended to be used as Thermal insulation for building equipment and industrial installations.
Manufacturer:	L'Isolante K-Flex Spa, Via Don Locatelli 35, 20877 Roncello (MB), ITALY
System/s of AVCP:	1 & 3
Harmonised standard:	EN 14304:2009+A1:2013
Notified body:	Notified certification body No. 0751 performed, carried out the determination of the product type, the initial inspection of the manufacturing plant and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of constancy of performance for reaction to fire. Notified testing laboratory No. 0497 performed the test reports for reaction to fire.

Declared performance/s:

Essential Characteristics	Performance
Thermal resistance / Thermal conductivity	$\lambda_{0^{\circ}\text{C}} \leq 0,036 \text{ W/(m}^{\circ}\text{K)}$ $\lambda_{40^{\circ}\text{C}} \leq 0,040 \text{ W/(m}^{\circ}\text{K)}$ $\lambda(\vartheta_m) = (36 + 0,087 \cdot \vartheta_m + 0,00098 \cdot \vartheta_m^2) / 1000 \text{ W/(m}^{\circ}\text{K)}$
Dimensions and tolerances	Di = 6-300 mm, dD = 51-75 mm
Reaction to fire	BL-s2,d0
Durability of thermal resistance against ageing/degradation	Dimensional stability (1) Minimum service temperature ST(-) 165 (=165 °C)
Durability of thermal resistance against high temperature	Maximum service temperature ST(+) 110 (=110 °C)
Durability of reaction to fire against high temperature	(2)
Durability of reaction to fire against ageing / degradation	(2)
Compressive strength	(3)
Water permeability	WS01
Water vapour permeability / Water vapour diffusion resistance	7000 μ
Rate of release of corrosive substances	Cl < 500ppm, pH = 7
Acoustic (absorption) index	NPD
Release of dangerous substances to the indoor environment	(4)
Continuous glowing combustion	(4)

*Tolerances as per European Regulation EN 14304:2009+A1:2013 – Table 1

- 1) The thermal conductivity of FEF does not change with time.
 - 2) The fire performance of FEF does not change with time.
 - 3) Compressive strength is not applicable for FEF products.
 - 4) European test methods are under development
- NPD = No Performance Determined.

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

This product is an article as defined in article 3 of regulation (EC) No 1907/2006 (REACH). It contains no substances which are intended to be released from the article under normal or reasonably foreseeable conditions of use. A safety data sheet following article 31 (Requirements for Safety Data Sheets) of the same regulation is not needed to bring the product to the market, to transport or to use it. For safe use follow the instructions given in product data sheet. As required by article 33 of regulation (EC) No 1907/2006 (Duty to communicate information on substances in article) we declare as follows: Based on our current knowledge, this product does not contain SVHC (substances of very high concern) as listed in Annex XIV of the REACH regulation or on the candidate list published by the European Chemicals Agency in concentrations above 0.1 % (w/w).

Roncello, 12/02/2021

Signed for and on behalf of the manufacturer by:



Amedeo Spinelli, President